

POS SOLUTIONS SB-8000



Touchscreen Terminal

Take control of your Point of Sale with a single touch



APPLICATIONS

- > Retail
- > Kiosks
- > Hospitality
- > Self service
- > Supermarkets
- > Restaurants and Fast Food outlets

CHARACTERISTICS

- > Industrial-grade components that ensure stability and high MTBF, maximizing sales
- > Extra bright 10.4" touch screen
- > Attractive, modern and robust design
- > High stability during touch screen operation
- > Resistant to spills
- > Supports a wide range of operational systems
- > Serves as platform to a large application base
- > Supports Wireless LAN and allows for portability out of wired environments
- > A fast terminal with a high transaction level that increases the operator's efficiency.

SB-8000


TOUCHSCREEN TERMINAL



TECHNICAL SPECIFICATIONS

FEATURES	SPECIFICATIONS
CPU	VIA LUKE CoreFusion Processor 1.0GHz
Chipset	VT8237R Plus
Display	10.4" TFT 800x600
Touch Panel	Resistive, liquid proof
Video	VIA UniChrome Pro 3D / 2D Graphics with SMA 16/32/64MB
Storage	40GB Toshiba 2,5" HD (Notebook)
Audio	2 Channel output. Phone-jack: Line-Out (1.2Watt), MIC-in and Line-in
Ethernet	10/100 Mbps - RJ-45. IEEE 802.3X compatible
Memory	One 184Pin Socket, supports DDR 400/333/266 up to 1GB
IDE Enhanced	2 IDE interfaces for up to UltraDMA 133/100/66/33 (2 x 40-pin +44-pin) Serial ATA (SATA): 2 ports with Raid 0, 1, JBOD
Expansion Interface	One PCI expansion up to 3 PCI slots via riser card with PCI 2.2 compliant
Parallel Port	bi-directional, supports SPP/EPP/ECP modes
Serial Ports	5 RS-232 1 RS-232/422/485 (via COM2 - optional) Support 16C550 UART and 16 byte FIFO. Energized with +5V, +12V (COM3~COM6 - optional).
PS/2 Ports	1 keyboard, 1 mouse
USB Ports	2 USB 2.0 ports
BIOS	V6.00 PG, EM3400M-LDA1- 2055/12/21
AC Adaptor	external: 100~240VAC - 12VDC
Operation Temperature	0 ~ 45°C
LCD Interface	4 input bits and 4 output bits (TTL level)
Watch Dog Timer	Programmable 1~255 seconds / minutes
Dimensions	280 mm width, 125 mm height, 300 mm depth
Weight	2,15 Kgs

Back Panel

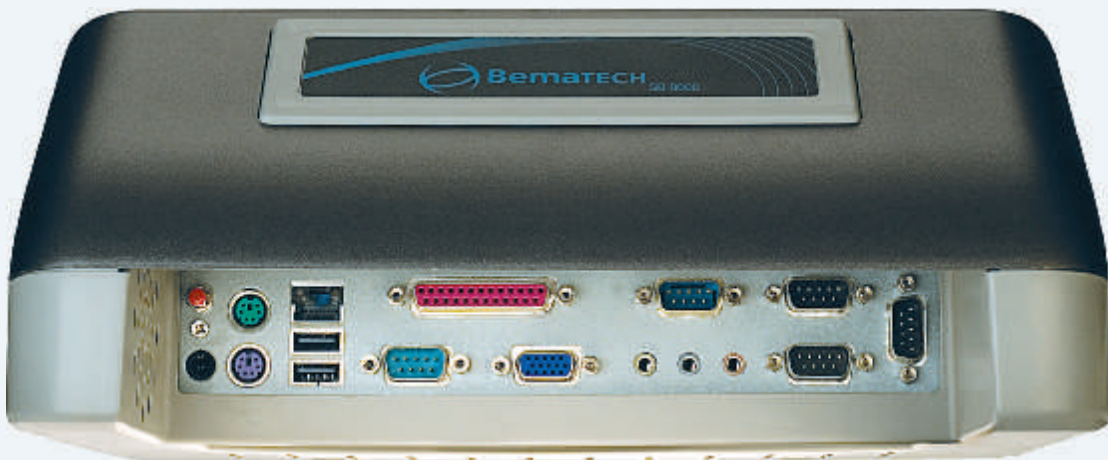

Bematech Europe GmbH 
 Address: Helmholtzstrasse 2-9. D 03.020
 10587. Berlin.
 Germany
 Phone: +49 30 417 69 187
 Fax: +49 30 417 69 188
 sales@bematech.com

Bematech International Corp. 
 Address: 6850 Shiloh Road East, Suite D
 Alpharetta - GA - 30005
 USA
 Phone: +1 678-947-8447
 Fax: +1 770-888-8535
 sales.us@bematech.com